
Steel

CP-W® and CP-K®

Product information for complex-phase steels



Issue: February 2023, version 0

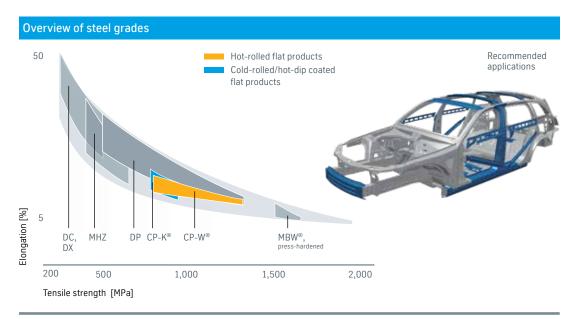

Content

- Areas of application
- 02 Steel grades available
- 02 Material characteristics
- 03 Technical features
- 04 Surfaces

01

- 06 Notes on application and processing
- 09 Dimensions available

Areas of application

Complex-phase steels CP-W® and CP-K® by thyssenkrupp offer very high strengths and yield points. They are particularly suitable for the weight-saving production of cold-formed, crash-relevant automotive components such as side impact intrusion beams, B-pillar reinforcements, sections, cross members, body reinforcements, bumper bars and chassis parts as well as seat rails.

The use of complex-phase steels in B-pillar reinforcements can double the strength compared for example to conventional micro-alloyed steels. The hot-rolled and cold-rolled grades currently available are characterized by strong strain hardening even with only minor deformation forces.

Steel grades available


thyssenkrupp supplies the following steel grades as per the product information or the reference steel grades in accordance with the respective standards.

| | | | | | Surface refinements | | | | | |
|---|--|--------------------------------|----------------|--|---------------------|----------|---------------------------------------|-------|--|--|
| | | | | -/UC | Z/GI | ZF/GA | ZM | AS | | |
| Complex-phase steel | | | | | | | | | | |
| Steel grade | Reference grade DIN EN 10152, 10338, 10346 | Reference grade VDA 239-100 | | | | | | | | |
| • CP-W [®] 660Y760T | HDT760C | HR660Y760T-CP | | • | • | | | | | |
| • CP-W [®] 800 | _ | - | | • | • | | | | | |
| • CP-W [®] 1000 | - | - | | • | | | | | | |
| • CP-K® 570Y780T | HCT780C | CR570Y780T-CP | | • | | | | | | |
| CP-K® 780Y980T | НСТ980С | CR780Y980T-CP | | • | • | | | | | |
| • CP-K® 900Y1180T | - | CR900Y1180T-CP | | • | • | | | | | |
| | | | | | | | | | | |
| Hot-rolled flat products Cold-rolled/hot-dip coat Serial production for une | | | UC GI GA | Uncoated Hot-dip zinc coating Galvannealed | | ZM AS | ZM Ecoprotect® Aluminum-silicon co | ating | | |


Material characteristics

Due to its selected chemical composition and special hot-rolling process, complex-phase steel has an extremely fine microstructure. In the complex interaction of matching microstructure components and precipitation hardening, this results in a particularly attractive combination of properties: high strength and wear resistance with good cold formability and weldability.

Micrograph of CP-W $^{\circ}$ 660Y760T and CP-K $^{\circ}$ 570Y780T

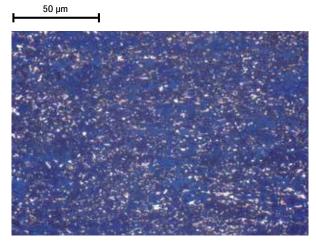

Microstructure of complex-phase steel CP-W $^\circ$ 660Y760T. Microstructural contrasting with color etching according to Klemm.

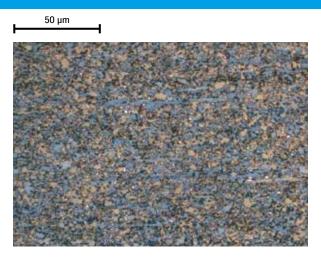

Microstructure of complex-phase steel CP-K $^{\odot}$ 570Y780T. Microstructural contrasting with color etching according to Klemm.

Technical features

| Chemical composition | | | | | | | | | | | |
|----------------------------------|---------------|----------------|----------------|---------------|---------------|-----------------|---------------------|---------------------|---------------|---------------|----------------|
| Mass fractions in ladle analysis | C [%] max. | Si [%] max. | Mn [%] max. | P [%] max. | S [%] max. | Al [%] total | Ti + Nb [%] max. | Cr + Mo [%] max. | V [%] max. | B [%] max. | Cu [%] max. |
| Steel grade | | | | | | | | | | | |
| • CP-W® 660Y760T | 0.10 | 1.00 | 2.20 | 0.050 | 0.010 | 0.015-1.0 | 0.25 | 1.00 | 0.20 | 0.005 | 0.20 |
| • CP-W [®] 800 | 0.10 | 1.00 | 2.20 | 0.050 | 0.010 | 0.015-1.0 | 0.25 | 1.00 | 0.20 | 0.005 | 0.20 |
| • CP-W [®] 1000 | 0.19 | 1.00 | 2.20 | 0.050 | 0.010 | 0.015-1.0 | 0.25 | 1.20 | 0.20 | 0.005 | 0.20 |
| • CP-K® 570Y780T | 0.10 | 1.00 | 2.20 | 0.050 | 0.010 | 0.015-1.0 | 0.15 | 1.00 | 0.20 | 0.005 | 0.20 |
| • CP-K® 780Y980T | 0.20 | 1.00 | 2.70 | 0.050 | 0.015 | 0.015-1.0 | 0.15 | 1.00 | 0.20 | 0.005 | 0.20 |
| • CP-K® 900Y1180T | 0.20 | 0.80 | 2.60 | 0.050 | 0.015 | 0.015-1.0 | 0.15 | 1.00 | 0.20 | 0.005 | 0.20 |

| Test direction in | Yield strength | Tensile strength | Elongation | | |
|------------------------------|-------------------------|---------------------------|------------|--------------------------|--|
| rolling direction | R _{p0.2} [MPa] | R _m [MPa] min. | A [%] min. | A ₈₀ [%] min. | |
| Steel grade | | | | | |
| • CP-W [®] 660Y760T | 660-820 | 760 | 13 | 10 | |
| • CP-K® 570Y780T | 570-720 | 780 | _ | 10 | |
| • CP-K® 780Y980T | 780-950 | 980 | _ | 8 | |
| • CP-K® 900Y1180T | 900-1,070 | 1,180 | _ | 6 | |

| Mechanical properties | | | | |
|--|---|---|----------------------|--------------------------|
| Test direction transverse to rolling direction | Yield strength R _{p0.2} [MPa] | Tensile strength R _m [MPa] min. | Elongation A[%] min. | A ₈₀ [%] min. |
| Steel grade | | | | |
| • CP-W [®] 800 | 680-830 | 780 | 12 | 10 |
| • CP-W [®] 1000 | 720-920 | 950 | 12 | 9 |

- Hot-rolled flat products
- Cold-rolled/hot-dip coated flat products
- $R_{p0.2}$ Proof strength at 0.2% plastic elongation
- Percentage elongation after fracture using a proportional specimen with $L_0 = 5.65 \text{ } \sqrt{\text{S}_0}$ for sheet thicknesses $\geq 3.0 \text{ mm}$ Percentage elongation after fracture using a specimen with gauge length $L_0 = 80 \text{ mm}$ for sheet thicknesses < 3.0 mm

Heat treatment of hot-rolled complex-phase steels at temperatures from 500 to 700°C can be used to increase the yield strength by up to 100 MPa (e.g., 680°C, dwell time 0.7 min/mm sheet thickness in saline bath).

In addition, forming in the temperature range from 550°C to 650°C enables complex parts to be produced without compromising the component properties.

Surfaces

| Surface refinements, hot-di | p galvanized¹) | | | | | |
|-----------------------------|----------------|-----------------------|-----------------------|----------------|-------------------|---------------------------|
| | Specification | • | | Coating on ea | Informative | |
| | | Triple spot sample | Single spot sample | Mass [g/m²] | Thickness [µm] | Typical thickness [µm] |
| Hot-dip zinc coating | | | | | | |
| Designation | | | | | | |
| GI100 | DIN EN | 100 | 85 | _ | 5-12 | 7 |
| G140 | VDA 239-100 | _ | - | 40-60 | 5.6 – 8.5 | _ |
| GI140 | DIN EN | 140 | 120 | - | 7-15 | 10 |
| GI60 | VDA 239-100 | _ | - | 60-90 | 8.5-13 | - |
| GI200 | DIN EN | 200 | 170 | _ | 10-20 | 14 |
| GI85 | VDA 239-100 | _ | _ | 85-115 | 12-16 | _ |

Further coatings on request.

| | Finish type | Surface quality |
|------------------------------|----------------------|------------------------------|
| Products | | |
| Cold-rolled flat products | Uncoated | A Normal surface |
| | | U Unexposed (interior parts) |
| Hot-dip coated flat products | Hot-dip zinc coating | B Improved surface |
| | | U Unexposed (interior parts) |

A/B as per DIN EN U as per VDA 239-100

¹⁾ Informative selection of typical surface finishes

| Surface treatments | | | | | |
|---------------------------|-------|------|-------|----|----|
| | | -/UC | ZF/GA | ZM | AS |
| Type of surface treatment | | | | | |
| 0 | Oiled | • | | | |

Serial production

UC Uncoated

GA ZM AS Galvannealed ZM Ecoprotect®

Aluminum-silicon coating

Notes on applications and processing

Forming

Complex-phase steels are particularly suitable for crashrelevant parts such as pillars, side impact intrusion beams and bumper bars. Hot-rolled complex-phase steels have a higher minimum yield strength when compared with dualphase steels of identical tensile strength. Complex-phase steels can be worked in crash forming operations in a single step without using a blank holder. Calibration should be integrated to enable specific, localized plasticization, in order to improve the dimensional accuracy of the components worked. Folding or bending operations are also customary, as are deep-drawing and stretch-forming operations up to the B-pillar geometry. Suitability for roll forming is guaranteed. This is where on account of their strain-hardening characteristics and bending ability, cold rolled complex-phase steels offer an interesting alternative to equal strength dual-phase steels. Due to their extremely fine microstructure, complex-phase steels also exhibit good hole expansion properties.

Particular attention must be paid to the design of the cutting and forming tools. Tool requirements are exacting, especially in cutting. In addition to a sufficient hardness of > 60 HRC, it is important to select suitable tool materials to simultaneously ensure high ductility, thus preventing premature breaking of the cutting edges. Specific rounding of the cutting edge in the dimension of about 50 microns helps to optimize the edge stability of the tools. The cutting gap must be designed to take the material thickness into account and should allow ≥10% of the sheet thickness.

A sufficient supporting hardness must be achieved for the forming tools. A segmented structure of the forming tools is common today. In highly stressed areas, the use of high speed steels may be necessary. These include 1.3343 or corresponding sintered tool materials. In addition, tool coatings such as CVD (TiC-TiN coating) can minimize tool wear.

The presses should have high pressing and hold-down force potentials. As a guideline, the tensile strength level should be considered here and compared with known materials.

Processing instructions for joining

Complex-phase steels are suitable for welding both same-grade joints and hybrid joints with other common steel grades. The precondition is welding parameters matched to the material.

Resistance spot welding

For spot welding complex-phase steels, the same equipment can basically be used as for welding unalloyed deep-drawing steels. However, the electrode forces should be increased respectively in order to achieve a large welding zone. Stable and rigid welding rods with large power reserves are therefore recommended for the spot welding of complex-phase steels; this may also offer advantages in cases of engineering fit issues. Extending the welding time has a positive effect on the welding zone; for this reason, medium to long welding times are recommended for spot welding.

| Typical properties of a resis | stance spot weld 1) | | | | | |
|-------------------------------|----------------------|-------------------------|---|--|-------------------------|-------------|
| | Sheet thickness t | Welding zone ΔI | Cross tensile strength d _{wmin} | Shear tensile strength d _{w min} | Mean hardness HV 0.1 | |
| | [mm] | [kA] | [kN] | [kN] | Base material | Weld nugget |
| Steel grade | | | | | | |
| • HX340LAD+Z | 1.5 | 2.0 | 9.9 | 13.7 | 165 | 330 |
| • CP-W [®] 660Y760T | 1.5 | 1.4 | 6.7 | 17.3 | 280 | 390 |
| • CP-W [®] 1000 | 1.5 | 1.5 | 6.2 | 18.9 | 330 | 460 |
| • CP-K® 570Y780T | 1.5 | 1.6 | 8.1 | 17.2 | 290 | 395 |

¹⁾ Test results as per SEP 1220-2.

- Hot-rolled flat products
- Cold-rolled/hot-dip coated flat products
- t Sheet thickness of test specimens
- d_{wmin} Welding spot diameter of 4 \sqrt{t}

CP-W® 660Y760T




CP-W® 1000



Good weld nugget formation.

Hardness profile of the weld nugget on a CP-W® 660Y760T

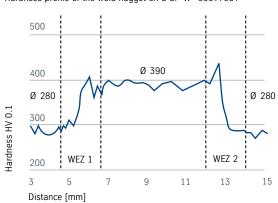

Relatively low hardening compared to the base material.

Compared to lower-strength steels, complex-phase steels have a lower electrical conductivity; lower welding currents are thus required for in spot welding electrodes with the same force. In resistance spot welding of galvanized sheets, the welding currents must be increased due to the higher conductivity of the coating compared with the base material (substrate).

In addition to the sheet type, surface and thickness combination, other factors e.g., the type of electrode used, play an important role in determining optimum joining parameters.

MIG arc brazing

Information sheet DVS 0938-2 "Arc brazing" describes the brazing of steels up to a tensile strength of approximately 500 MPa. As the material described here is above this tensile strength, it is advisable to check the component-specific suitability for brazing.

Fatigue strength and crash performance

Complex-phase steels exhibit high structural durability. In terms of stress-strain curve characteristics the steels are superior to dual-phase and retained-austenite steels. However, in cases of excessive elongation, i.e. in cases of misuse load, their behavior is more sensitive.

High resistance to crash deformation is assured by the high yield point, without compromising elongation at break values. This group of materials is thus suitable for, e.g. A-pillar and B-pillar reinforcement parts, which are specially designed to prevent component group buckling under crash load.

Dimensions available

CP-W[®] 660Y760T, CP-W[®] 800




GI Hot-dip zinc coating

GI trimmed
Uncoated with mill edge

For interior parts
Typical dimensions for automotive
customers. Restrictions may apply to
steel grades as per VDA 239-100.

CP-W® 1000




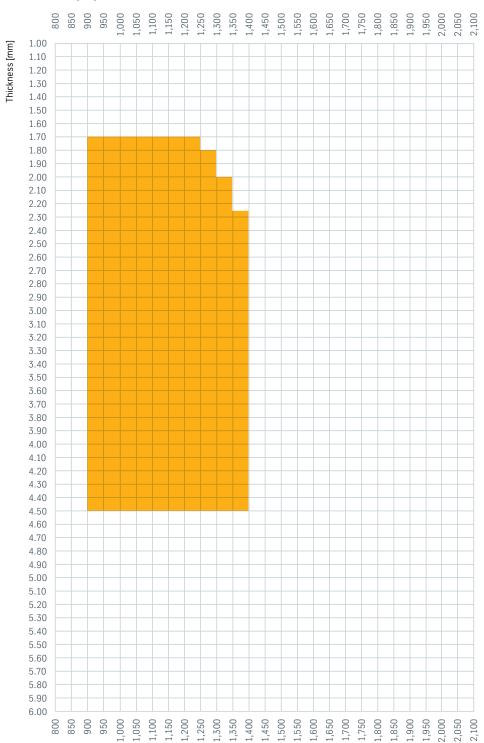

Uncoated with mill edge

For interior parts
Typical dimensions for automotive customers.

CP-K® 570Y780T

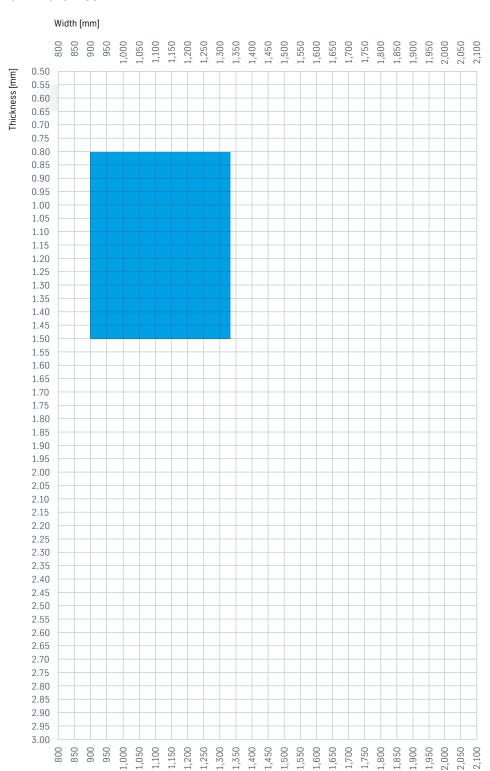


Uncoated with mill edge

For interior parts
Typical dimensions for automotive
customers. Restrictions may apply to
steel grades as per VDA 239-100.

CP-K® 780Y980T



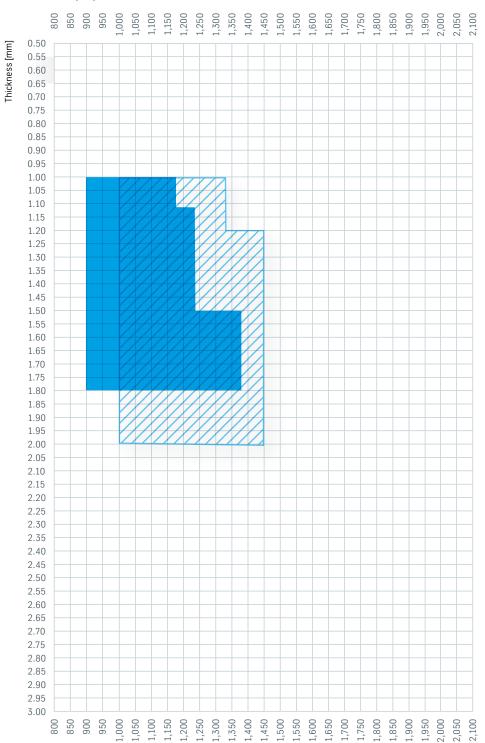


GI Hot-dip zinc coating

Uncoated with mill edge
GI trimmed

For interior parts
Typical dimensions for automotive
customers. Restrictions may apply to
steel grades as per VDA 239-100.

CP-K® 900Y1180T



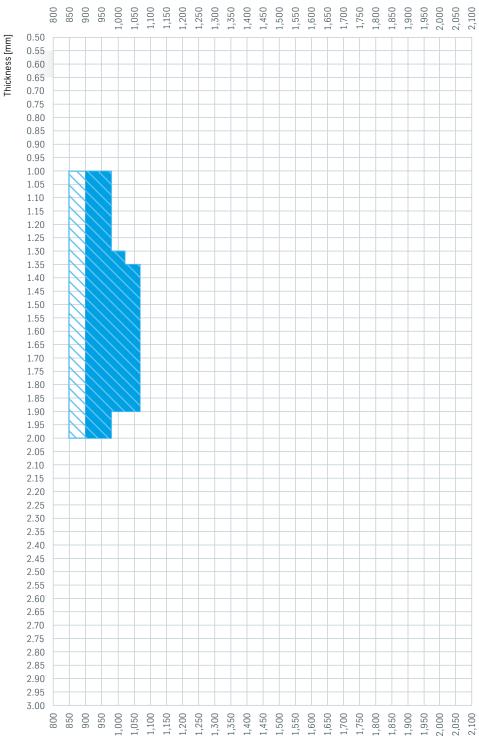

GI Hot-dip zinc coating

Uncoated with mill edge

For interior parts
Typical dimensions for automotive
customers. Restrictions may apply to
steel grades as per VDA 239-100.

Special mill grades are supplied subject to the special conditions of thyssenkrupp. Other delivery conditions not specified here will be based on the applicable specifications. The specifications used will be those valid on the date of issue of this product information brochure.

General information

All statements as to the properties or utilization of the materials and products mentioned in this brochure are for the purpose of description only. Guarantees in respect of the existence of certain properties or utilization of the material mentioned are only valid if agreed in writing. Subject to technical changes without notice. Reprints, even extracts, only with the permission of thyssenkrupp Steel Europe AG. The latest information can be found on the Internet: www.thyssenkrupp-steel.com/publications